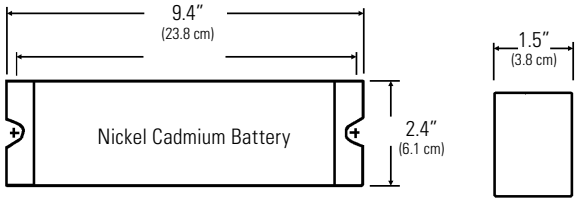

Complete Fixture consists of ballast unit. Select options and accessories below.

Model #	Max. Lumens	Lamp Operation
FBP1000-4P	1000	One Lamp 4-Pin Fluorescent (without integral starter)

Features

1. **Lamp Operation:** Operates the following lamp types: T4 Compact Fluorescent (4-pin base), 13W - 50W twin, quad and triple twin-tube without integral starter. See Lamp Operation and Performance table for specific lamp performance and operation.
2. **Illumination:** Provides 90 minutes of emergency illumination, and produces a maximum of 1,000 lumens initial emergency light output.
3. **Housing:** Constructed of 20 gauge steel with a high temperature powder coat finish. Housing allows for frame mounting on most recessed luminaires. Housing includes 2' lengths of flex conduit attached on each end.
4. **Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Charging system is complete with AC indicator lamp and test switch.
5. **Battery:** Maintenance free, sealed nickel cadmium battery has an estimated service life of 10 years, and an operating temperature range of 32°F (0°C) to 131°F (55°C)
6. **Input Power Requirements:** 3.5 watts max.
7. **Warranty: Electronics:** 2 years; Battery: 2 years.

Code Compliance

U.L. 924 listed.

Options

EX = Special Input Transformer for 220 VAC/50 Hz, 240 VAC/50Hz. Contact factory for other input voltages and frequencies.

Accessories

CCAPS = Wire bundle cover for mounting external to luminaire.

RT = Remote Test Switch.

Lamp Operation and Performance

Lamp Type	Watt.	Non-Emer. Base Type	Non-Emer. Max. Lumen Output	Emer. Op. Max. Lumen Output	Emer Lamp Operation
F18DBX/4P	18	G24Q-2	1150	500	One or Two
F26DBX/4P	26	G24Q-3	1710	675	One or Two
F18TBX/4P	18	GX24Q-2	1200	400	One or Two
F26TBX/4P	26	GX24Q-3	1800	600	One or Two
F32TBX/4P	32	GX24Q-3	2200	750	One or Two
F18BX	18	2G11/4-Pin	1250	325	One or Two
F27/24BX/RS	27	2G11/4-Pin	1800	525	One or Two
F39/36BX/RS	39	2G11/4-Pin	2850	725	One or Two
F40/30BX/RS	40	2G11/4-Pin	3150	600	One
F50BX/RS	50	2G11/4-Pin	4000	825	One
F162D/4P	16	GR10Q-4	1050	550	One or Two
F212D/4P	21	GR10Q-4	1350	550	One or Two
F282D/4P	28	GR10Q-4	2050	550	One or Two
F382D/4P	38	GR10Q-4	2850	675	One or Two
F42TBXT4	42	GX24Q-4P	3200	1000	One

Notes:

1. Maximum non-emergency lumen output can vary based on lamp manufacturer, ambient operating temperature, and ballast manufacturer.
2. Maximum emergency lumen output is based on total output of one or two lamps, and can vary based on lamp manufacturer and ambient operating temperature.
3. Maximum emergency lumen output is supported for a full 90 minutes of operation.
4. Consult factory for compatibility, operation and performance of lamp types not listed.

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • C0308